



MINIBOX 21 Transmitter Enclosure

Made of hot-pressed glassfibre reinforced polyester (GRP)
 Two-part construction: horizontal or vertical mounting possible
 Space-saving storage
 Approved by Lloyd's of Germany
 Hardly inflammable and self-extinguishing
 All metal parts in stainless steel

- Colour RAL 7032 light grey
- UV-resistant
- Weight approx. 3 kg
- Protection class IP44

Dimensions horizontal: (approx.)
 H x B x T = 300 x 388 x 218mm
 Dimensions vertical: (approx.)
 H x B x T = 388 x 218 x 300mm

Heat transition coefficient K	without window	with window
Normal (without insulation)	1,8 W/K	1,9 W/K
arctic PP	0,6 W/K	0,7 W/K

Standard Design

- SE2** Standard without cut-outs with 2 hinges and 2 clasps

Optional Designs

- SV4** 4 Clasps
- DSL** Double row of hinges with C-rail
- FS** Safety glass window & Ø 150 mm

arctic Insulation

with PU-foam, not stackable one inside the other

- arctic PP** internal polypropylene lining
- GO** antistatic design to avoid electrostatic charge accumulation to DIN EN IEC 60079-0

Cut-outs

- Cut-out for FLEXIPASS R
 - Cut-out for FLEXIPASS T
 - Window cut-out, Ø150mm
C ≥ 121mm
 - Special cut-out
- Specify the dimensions and location of A and B (2) and/or C (1) with order placement


Accessories

- FLEXIPASS R** for piping, 40 mm thick
- FLEXIPASS T** for transmitter, 20 mm thick
- BT** Support bracket (internal), stainless steel (anodized aluminium upon request) for transmitter installation, adjustable
- BU** Support with C-rail
- BR** Support bracket (external), stainless steel for installation of MINIBOX on pipestand
- RS 21** Mounting bracket for 2" pipestand
- MS 50-QS-M** Mounting rail


Increased Protection class

- IP65**

Horizontal Mounting

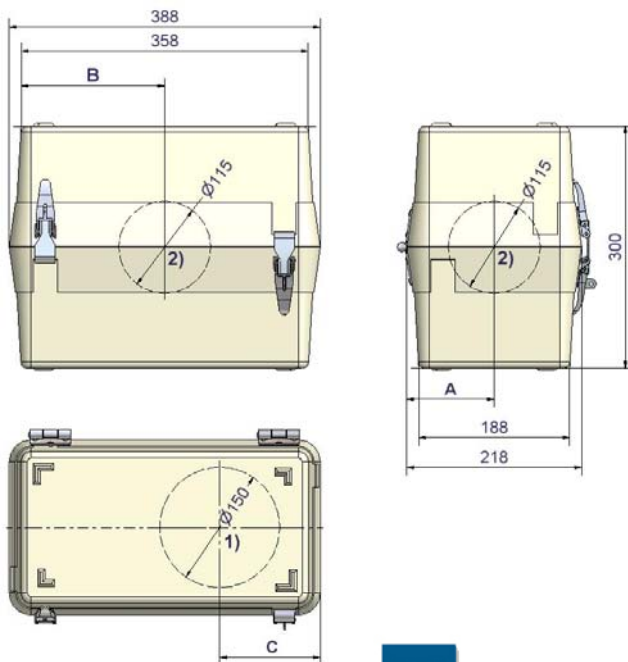

Vertical Mounting

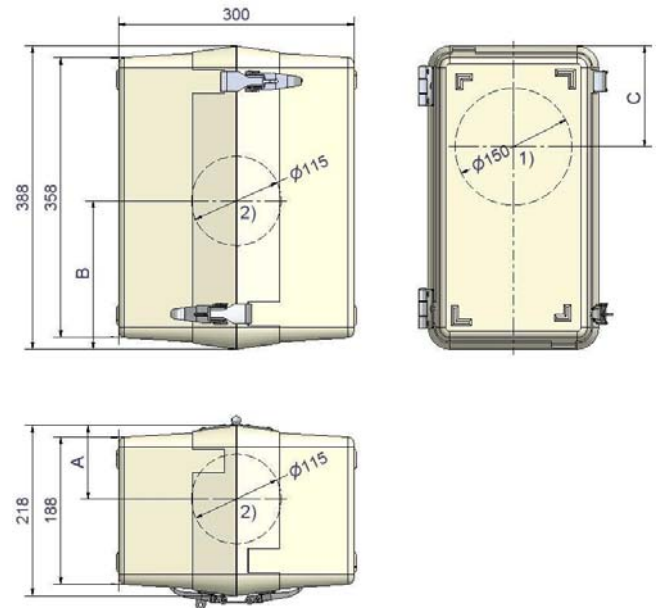

Distribuidores autorizados para Uruguay
 Venta - Ingeniería - Instalación - Mantenimiento
 Francisco Soca 1531
 Telefono: +598 2 707 48 01
 Montevideo Uruguay
 Mail: info@techingenium.com.uy
 www.techingenium.com.uy