



BASIC 101.xxx.035


Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032
 Protection class IP65
 Heat transfer coefficient $k=1,5 \text{ Watt/m}^2\text{Kelvin}$

Clasps and hinges, stainless steel 316 (1.4571)
 3-point locking device with burglary-resistant swing handle with profile cylinder to DIN 18252 (lockable)
 EPDM gasket

Optionen

- MP** Mounting plate in
 - steel, zinc coated / stainless steel
- C-rail** Vertical c-rails in stainless steel / anodized aluminium / UNISTRUT
- FA/FS** acrylic glass/ safety glass window

- GO** Antistatic to avoid electrostatic charges according to EN IEC 60079-0
- Colour** Special colour to RAL o request
- WA** Wall fastening inside/ outside

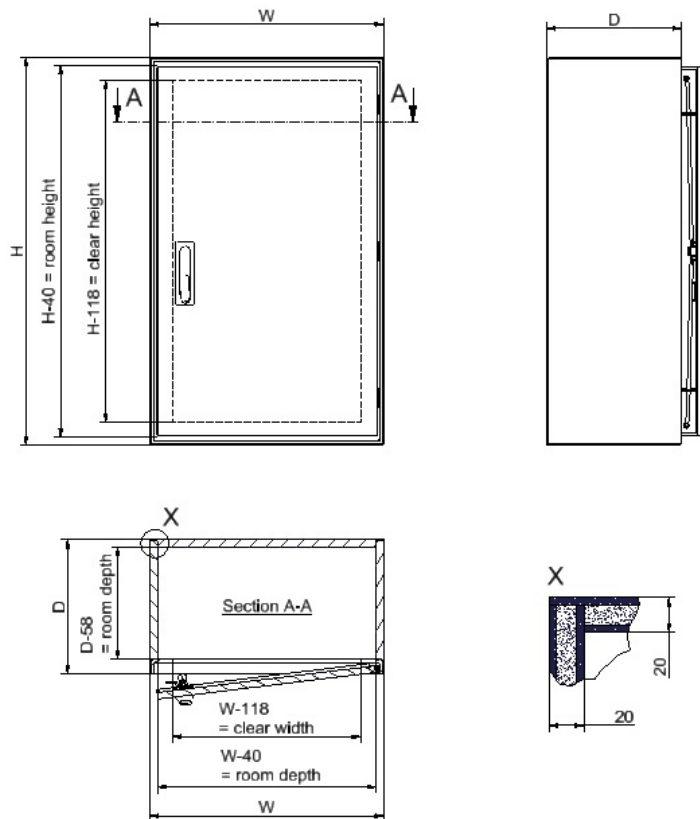

Type (Standard)	Hight H	Width W	Depth D
BASIC 101.064.035	1040	640	350
BASIC 101.084.035	1040	840	350
BASIC 101.104.035	1040	1040	350



Distribuidores autorizados para Uruguay
 Venta - Ingeniería - Instalación - Mantenimiento
 Francisco Soca 1531
 Telefono: +598 2 707 48 01
 Montevideo Uruguay
 Mail: info@techingenium.com.uy
 www.techingenium.com.uy