



BASIC 100.xxx.xxx - single door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032
 Protection class IP 65

Vertical c-rails provided at the rear wall
 Door with 3-point locking device and burglary-resistant swing handle with profile cylinder to DIN 18252

Arrangement


Floor: Sandwich-floor with PU-foam core 25 mm (standard)

- Upon special request: GRP 5 mm
- GRP 5 mm with opening size (see data sheet SD525-xe, floor version C BASIC)

- FA/FS** Acrylic glass/ Safety glass window
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening
- WA** Wall fastening inside/ outside
- SZ** Ground vault for installation in the ground

Options

- MP** Mounting plate

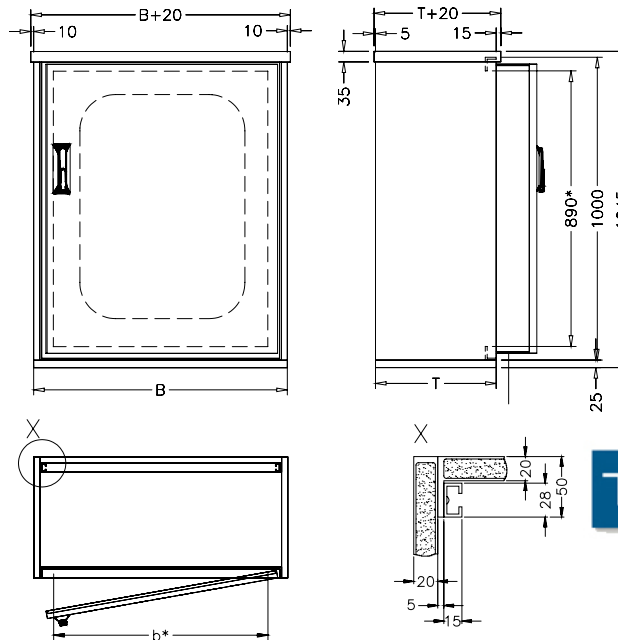

* clear width



Distribuidores autorizados para Uruguay
 Venta - Ingeniería - Instalación - Mantenimiento
 Francisco Soca 1531
 Teléfono: +598 2 707 48 01
 Montevideo Uruguay
 Mail: info@techingenium.com.uy
 www.techingenium.com.uy

Type	Sizes (mm) with floor			
	H	B	b	T
100.040.030	1045	440	290	300
100.040.040				400
100.040.060				600
100.040.080				800
100.040.100				1000
100.060.030 **				640
100.060.040 **	400			
100.060.060	600			
100.060.080	800			
100.060.100	1000			

Type	Sizes (mm) with floor			
	H	B	b	T
100.080.030	1045	840	690	300
100.080.040				400
100.080.060				600
100.080.080				800
100.080.100				1000
100.100.030				1040
100.100.040	400			
100.100.060	600			
100.100.080	800			
100.100.100	1000			

* Base acc. to DIN 43629 available – see Data-sheet SD193-..e