



BASIC 200.xxx.xxx - single door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032
 Protection class IP 65

Vertical c-rails provided at the rear wall
 Door with 3-point locking device and burglary-resistant swing handle with profile cylinder to DIN 18252


Arrangement

- Floor: Sandwich-floor with PU-foam core 25 mm (standard)
- Upon special request: GRP 5 mm
- GRP 5 mm with opening size (see data sheet SD525-xe, floor version C BASIC)

Options

- MP** Mounting plate

- FA/FS** Acrylic glass/ Safety glass window
- C-VA** Vertical c-rails in stainless steel instead of alum.
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening
- WA** Wall fastening inside/ outside
- SZ** Ground vault for installation in the ground

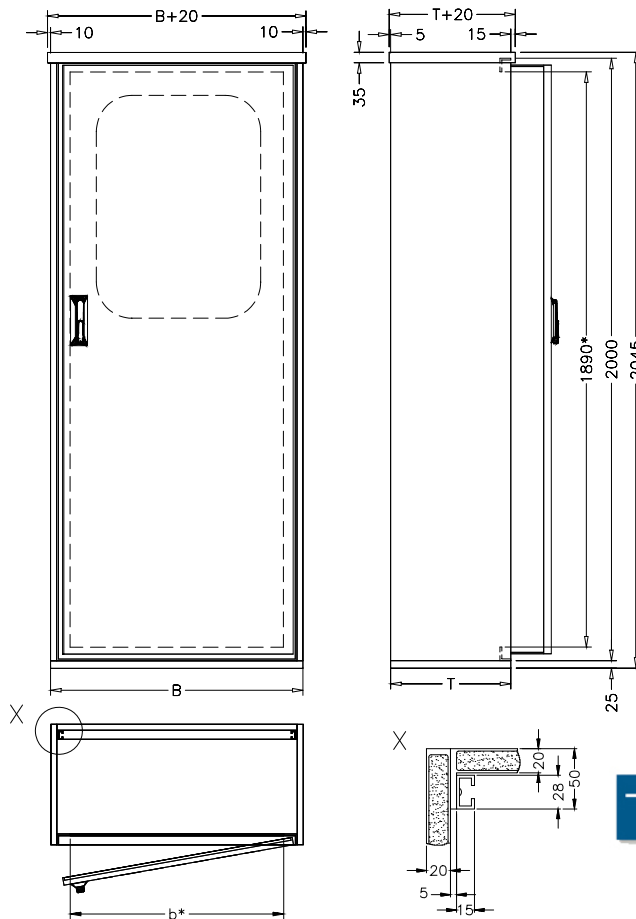

* clear width



Distribuidores autorizados para Uruguay
 Venta - Ingeniería - Instalación - Mantenimiento
 Francisco Soca 1531
 Teléfono: +598 2 707 48 01
 Montevideo Uruguay
 Mail: info@techingenium.com.uy
 www.techingenium.com.uy

Type	Sizes (mm) with floor			
	H	B	b	T
200.040.030	2045	440	290	300
200.040.040				400
200.040.060				600
200.040.080				800
200.040.100		1000		
200.060.030		640	490	300
200.060.040				400
200.060.060				600
200.060.080				800
200.060.100				1000

Type	Sizes (mm) with floor			
	H	B	b	T
200.080.030	2045	840	690	300
200.080.040				400
200.080.060				600
200.080.080				800
200.080.100		1000		
200.100.030		1040	890	300
200.100.040				400
200.100.060				600
200.100.080				800
200.100.100				1000