



BASIC 200.129.xxx - double door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032
 Protection class IP 54
 Vertical c-rails provided at the rear wall

Door with 3-point locking device and burglary-resistant swing handle with profile cylinder to DIN 18252 (lockable)
 Basquil-locking-device for left door and overlapflange of stainless steel


Arrangement

Floor: Sandwich-floor with PU-foam core 25 mm (standard)
 Upon special request: GRP 5 mm
 GRP 5 mm with opening size (see data sheet [SD525e](#), floor version C BASIC)

- FA/FS** Acrylic glass/ Safety glass window
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening
- WA** Wall fastening inside/ outside
- SZ** Ground vault for installation in the ground

Options

MP Mounting plate

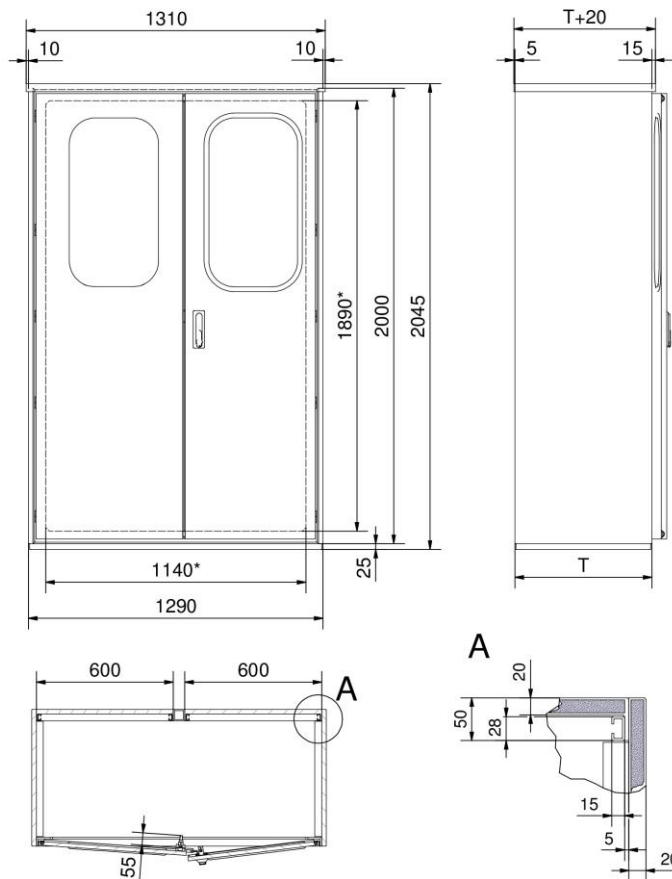

* clear width

Type	Sizes (mm) with floor		
	H	B	T
200.129.030	2045	1290	300
200.129.040			400
200.129.060			600
200.129.080			800