



# CLASSIC 160.070.xxx/ 160.090.xxx/ 160.110.xxx - single door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core  
 Corner posts of GRP with vertical c-rails  
 Textured surface in grey RAL 7032  
 Protection class IP 65

Vertical c-rails provided at the side wall and rear wall  
 3-point locking device with burglary-resistant swing handle with profile cylinder to DIN 18252 (lockable)  
 Roof overhang 25 mm all around

## Arrangement


Floor (see data sheet Sd522-xe „Floor versions for classic series“)

## Options

- MP** Mounting plate
- FA/FS**  Acrylic glass/  Safety glass window
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** Antistatic to avoid electrostatic charges according to EN IEC 60079-0
- F30** Fire resistance class F30
- SB** Floor fastening (see data sheet Sd523-xe „Fastenings for classic-floor versions design ...“)
- WA** Wall fastening  inside/  outside
- SZ** Ground vault



Distribuidores autorizados para Uruguay  
 Venta - Ingeniería - Instalación - Mantenimiento  
 Francisco Soca 1531  
 Teléfono: +598 2 707 48 01  
 Montevideo Uruguay  
 Mail: info@techingenium.com.uy  
 www.techingenium.com.uy

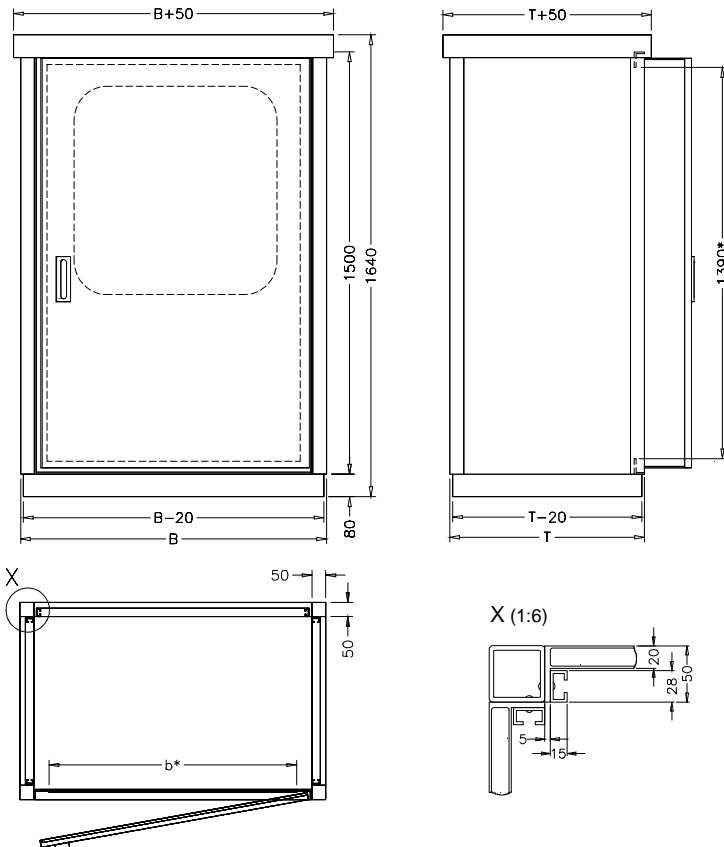

\*clear width

scale 1:25

Type	H	Sizes with floor		
		B	b	T
160.070.050	1640	700	490	500
160.070.070				700
160.070.090				900
160.070.110				1100
160.090.050	900	690	690	500
160.090.070				700

Type	H	Sizes (mm) with floor		
		B	b	T
160.090.090	1640	1100	890	900
160.090.110				1100
160.110.050				500
160.110.070				700
160.110.090	1100	890	890	900
160.110.110				1100