



# CLASSIC 210.195.xxx - double door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core  
 Corner posts of GRP with vertical c-rails  
 Textured surface in grey RAL 7032  
 Protection class IP 54

Vertical c-rails provided at the side wall and rear wall  
 Door with 3-point locking device with burglary-resistant swing handle with profile cylinder to DIN 18252 (lockable)  
 Basquill-locking-device for left door and overlapflange of stainless steel

### Arrangement


Floor (see data sheet [SD522e](#) "Floor versions for classic series")

### Options

- MP** Mounting plate
- FA/FS**  Acrylic glass/  Safety glass window
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** Antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening (see data sheet [Sd523e](#) "Fastenings for classic-floor versions design ...")
- WA** Wall fastening  inside/  outside
- SZ** Ground vault



Distribuidores autorizados para Uruguay  
 Venta - Ingeniería - Instalación - Mantenimiento  
 Francisco Soca 1531  
 Teléfono: +598 2 707 48 01  
 Montevideo Uruguay  
 Mail: info@techingenium.com.uy  
 www.techingenium.com.uy

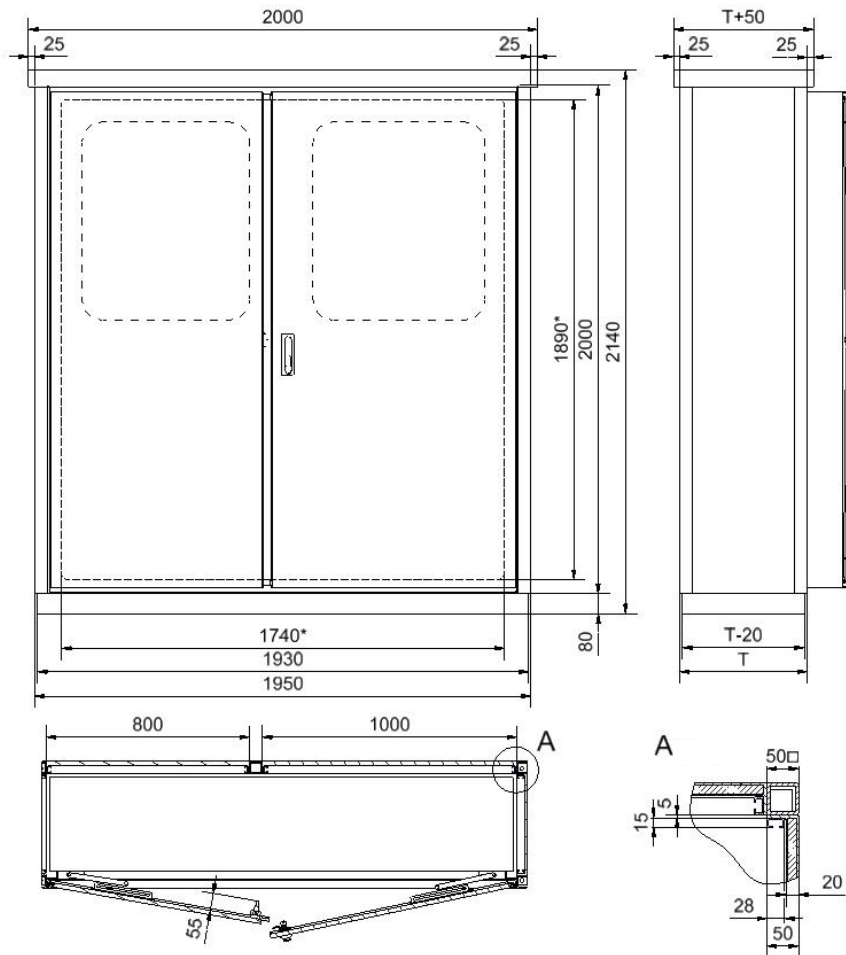

\* clear width

Type	Sizes (mm) with floor		
	H	B	T
210.195.050	2140	1950	500
210.195.070			700
210.195.090			900
210.195.110			1100