

# **Electric Heater Series E 150**



# 1 Application


Heating of instrument enclosures, cabinets and switchgear cabinets if explosion protection is not required. For: INDUSTRIAL USE ONLY"

- Freeze protection
- Protection against condensation
- Temperature maintenance.

### 2 Special Features

- High heat transfer capabilities due to the unique design of the black anodized aluminium fins
- Built-in adjustable thermostat with light
- Silicone supply cord

## 3 Dimensions

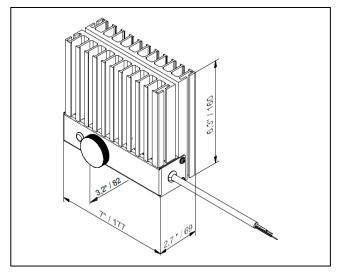

4 Technical Data



### 5 Description

The convection heater consists of a reliable tubular heating element which is "sandwiched" between two extruded black anodized profiles of saltwater-proof aluminium alloy. The thermostat housing is at the bottom of the heater. There is an adjustable thermostat and control light, which indicates when the heater is on.

For applications with more stringent requirements (e.g. humid ambient conditions) use INTERTEC heaters (protection degree IP 68).



# Techingenium

Distribuidores autorizados para Uruguay Venta - Ingeniería - Instalación - Mantenimiento Francisco Soca 1531 Telefono: +598 2 707 48 01 Montevideo Uruguay Mail: info@techingenium.com.uy www.techingenium.com.uy

	E 159	E 160	E 155	E 156	E 158
Nominal Power	500 W	260 W	500 W	250 W	500 W
Nominal Voltage	120 V AC	120 V AC	240 V AC	240 V AC	250 V AC
Adjustment Range	40115 F/ 545°C				
Ingress Protection	IP 30				
Weight	3,75 lbs/ 1,7 kg				
CSA Certificate	File # 205586	66 (LR43674)			

HD421-6c Series E 150


page 1/ 2

INTERTEC Instrumentation - Sarnia, Ontario - Houston, Texas - Phone: 1-888-875-8756

www.intertec.info

# **Electric Heater Series E 150**

#### Wiring Diagram 6

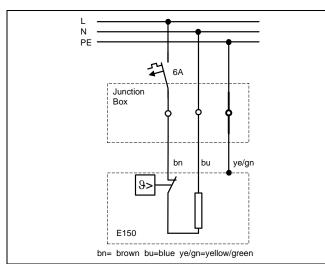



#### 7 Installation

The heater has to be installed with the fins vertical; heat sink faces up, control unit at bottom. In order to allow free air convection, a space of 4"/ 100 mm above and 2"/ 50 mm beneath the heater should remain clear.


The mounting bracket can be installed by sliding the nuts on any one of the fin on the vertical sides of the heater. We recommend to loosely assemble the sliding nuts to the mounting bracket first and then insert them in the desired fins.

### 7.1 Attached to the Mounting Rail in the **INTERTEC Instrument Enclosure**

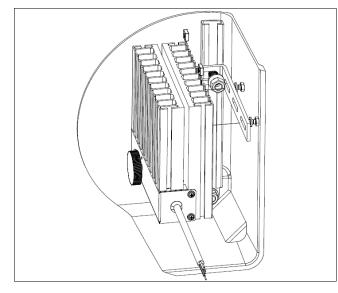

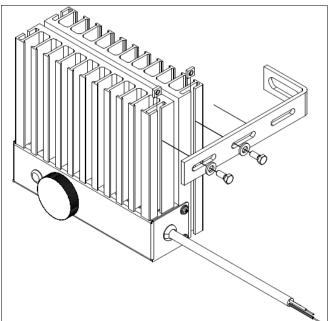

7.3 Attached to the C-Rail of an INTERTEC **Protective Cabinet** 

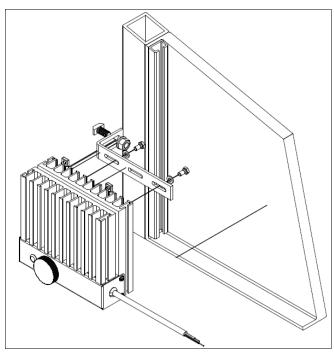

The mounting bracket and all shown bolts and nuts are supplied with the heater.

Attached to a Mounting Plate

7.2

HD421-6c Series E 150 page 2/ 2 INTERTEC Instrumentation - Sarnia, Ontario - Houston, Texas - Phone: 1-888-875-8756



**Protected operating conditions**