



## Plug and Socket Devices SolConeX 16 A Series 8570

www.stahl.de



12127E00

- > Switch socket / plug 16 A
- > Minimal force required to insert and remove
- > Can be optionally equipped with an auxiliary contact for control and signalling purposes
- > Large switching handle
  - with clear position indication
  - able to be padlocked in 0- and I-position
- > With motor switching capacity AC-3 acc. to IEC 60947-3
- > Self-cleaning contacts for superior reliability
- > IP66 in any application position

E3



The SolConeX plug and socket devices Series 8570 are 16 A versions. An important safety criterion is the reliable load disconnect switch with the large, highly visible handle. Plugging in and unplugging is done easily and safely in 0 position. The plugs and sockets comply with IEC/EN 60309-1/-2/-4 (CEE), IEC/EN 60079-0, IEC/EN 60079-1 and IEC/EN 60079-7. The ability to plug the Ex-plug in non-Ex-sockets is guaranteed, while operation of the Ex-socket using a non-Ex-plug is reliably prevented.











	ATEX / IECEx						Zone	NEC 505			NEC 506			Division	NEC 500						
	0	1	2	20	21	22		Class I			20	21	22		Class I		Class II		Class III		
Zone	0	1	2	20	21	22	Zone	0	1	2	20	21	22	Division	1	2	1	2	1	2	
For use in		x	x		x	x	For use in		x	x				For use in		x		x			x

**WebCode 8570A**

# Plug and Socket Devices SolConeX 16 A Series 8570



Selection Table





Version	No. of poles	Voltage [V]	Colour code	Frequency Hz	h	Metal adapter	Order number	Weight kg	
SolConeX 16 A switch socket 	 16992E00 3 P (2 P + PE)	>50	green	>300-500 <sup>1)</sup>	2	--	8570/11-302	1.120	
		50 ... 110	light grey	DC	3	--	8570/11-303	1.120	
		100 ... 130	yellow	50 and 60	4	--	8570/11-304	1.120	
		200 ... 250	blue	50 and 60	6	--	8570/11-306	1.120	
		277	light grey	60	5	--	8570/11-305	1.120	
		380 ... 415	red	50 and 60	9	--	8570/11-309	1.120	
	 06556E00 4 P (3 P + PE)	480 ... 500	black	50 and 60	7	--	8570/11-307	1.120	
		>50	green	>300-500 <sup>1)</sup>	2	--	8570/11-402	1.350	
		>50	green	100-300 <sup>1)</sup>	10	--	8570/11-410	1.350	
		100 ... 130	yellow	50 and 60	4	--	8570/11-404	1.350	
		200 ... 250	blue	50 and 60	9	--	8570/11-409	1.350	
		380 ... 415	red	50 and 60	6	--	8570/11-406	1.350	
		380 ... 380	red	50	3	--	8570/11-403	1.350	
		440 ... 460	red	60	11	--	8570/11-411	1.350	
		480 ... 500	black	50 and 60	7	--	8570/11-407	1.350	
		600 ... 690	black	50 and 60	5	--	8570/11-405	1.350	
	 06555E00 5 P (3 P + N + PE)	57 / 100 ... 75 / 130	yellow	50 and 60	4	--	8570/11-504	1.450	
		120 / 208 ... 144 / 250	blue	50 and 60	9	--	8570/11-509	1.450	
		200 / 346 ... 240 / 415	red	50 and 60	6	--	8570/11-506	1.450	
		220 / 380	red	50	3	--	8570/11-503	1.450	
		250 / 440 ... 265 / 460	red	60	11	--	8570/11-511	1.450	
		277 / 480 ... 288 / 500	black	50 and 60	7	--	8570/11-507	1.450	
		347 / 600 ... 400 / 690	black	50 and 60	5	--	8570/11-505	1.450	
		<b>Variants with metal earth plate for two metal cable entries and stopping plugs</b>							
	 16992E00 3 P (2 P + PE)	100 ... 130	yellow	50 and 60	4	M20 x 1.5	8570/11-304-S019	1.120	
		100 ... 130	yellow	50 and 60	4	M25 x 1.5	8570/11-304-S011	1.120	
		200 ... 250	blue	50 and 60	6	M20 x 1.5	8570/11-306-S019	1.120	
		200 ... 250	blue	50 and 60	6	M25 x 1.5	8570/11-306-S011	1.120	
	 06556E00 4 P (3 P + PE)	200 ... 250	blue	50 and 60	9	M20 x 1.5	8570/11-409-S020	1.350	
		380 ... 415	red	50 and 60	6	M20 x 1.5	8570/11-406-S020	1.120	
380 ... 415		red	50 and 60	6	M25 x 1.5	8570/11-406-S012	1.120		
480 ... 500		black	50 and 60	7	M20 x 1.5	8570/11-407-S020	1.350		
 06555E00 5 P (3 P + N + PE)	600 ... 690	black	50 and 60	5	M20 x 1.5	8570/11-405-S020	1.350		
	200 / 346 ... 240 / 415	red	50 and 60	6	M20 x 1.5	8570/11-506-S020	1.120		
<b>Variants with auxiliary contact (NO) and cable entry with stopping plug</b>									
 16992E00 3 P (2 P + PE)	200 ... 250	blue	50 and 60	6	--	8570/11-306-S001	1.120		
	 06556E00 4 P (3 P + PE)	380 ... 415	red	50 and 60	6	--	8570/11-406-S001	1.350	
480 ... 500		black	50 and 60	7	--	8570/11-407-S001	1.350		
600 ... 690		black	50 and 60	5	--	8570/11-405-S001	1.350		
 06555E00 5 P (3 P + N + PE)	200 / 346 ... 240 / 415	red	50 and 60	6	--	8570/11-506-S001	1.600		

\* All number of poles: All nominal operating voltages and/or frequencies not covered by other arrangements have the position of the earth contact sleeve 1 h.

# Plug and Socket Devices SolConeX 16 A Series 8570



## Selection Table

Version	No. of poles	Voltage [V]	Colour code	Frequency Hz	h	Metal adapter	Order number	Weight kg
 SolConeX 16 A plug  10329E00	 09195E00 3 P (2 P + PE)	>50	green	>300-500 <sup>1)</sup>	2	--	8570/12-302	0.310
		50 ... 110	light grey	DC	3	--	8570/12-303	0.310
		100 ... 130	yellow	50 and 60	4	--	8570/12-304	0.420
		380 ... 415	red	50 and 60	9	--	8570/12-309	0.310
		200 ... 250	blue	50 and 60	6	--	8570/12-306	0.420
		277	light grey	60	5	--	8570/12-305	0.310
		480 ... 500	black	50 and 60	7	--	8570/12-307	0.310
	 09191E00 4 P (3 P + PE)	>50	green	100-300 <sup>1)</sup>	10	--	8570/12-410	0.380
		>50	green	300-500	2	--	8570/12-402	0.380
		100 ... 130	yellow	50 and 60	4	--	8570/12-404	0.380
		200 ... 250	blue	50 and 60	9	--	8570/12-409	0.380
		380 ... 380	red	50	3	--	8570/12-403	0.380
		380 ... 415	red	50 and 60	6	--	8570/12-406	0.380
		440 ... 460	red	60	11	--	8570/12-411	0.380
	480 ... 500	black	50 and 60	7	--	8570/12-407	0.380	
	 09196E00 5 P (3 P + N + PE)	600 ... 690	black	50 and 60	5	--	8570/12-405	0.380
		220 / 380	red	50	3	--	8570/12-503	0.450
		120 / 208 ... 144 / 250	blue	50 and 60	9	--	8570/12-509	0.430
		200 / 346 ... 240 / 415	red	50 and 60	6	--	8570/12-506	0.430
		57 / 100 ... 75 / 130	yellow	50 and 60	4	--	8570/12-504	0.450
		250 / 440 ... 265 / 460	red	60	11	--	8570/12-511	0.430
277 / 480 ... 288 / 500		black	50 and 60	7	--	8570/12-507	0.430	
347 / 600 ... 400 / 690	black	50 and 60	5	--	8570/12-505	0.430		

\* All number of poles: All nominal operating voltages and/or frequencies not covered by other arrangements have the position of the earth contact sleeve 1 h.

## Explosion Protection

### Global (IECEX)

Gas and dust

IECEX PTB 05.0023

Ex d e IIC T6 Gb (Ta = -30 ... +55 °C)  
with intrinsically safe auxiliary contacts:  
Ex d e [ia Ga] IIC T6 Gb (Ta = -30 ... +55 °C)  
Ex tD A21 IP66 T80°C Db (Ta = -30 ... +55 °C)

### Europe (ATEX)

Gas and dust

PTB 03 ATEX 1227

⊕ II 2 G Ex d e IIC T6 Gb (Ta = -30 ... +55 °C)  
with intrinsically safe auxiliary contacts:  
⊕ II 2 G Ex d e [ia Ga] IIC T6 Gb (Ta = -30 ... +55 °C)  
⊕ II 2 D Ex tD A21 IP66 T80°C Db (Ta = -30 ... +55 °C)

## Certifications and certificates

Certificates

IECEX, ATEX, Brazil (INMETRO), China (China-Ex), India (PESO), Canada (CSA), Kazakhstan (TR), Korea (KCs), Russia (TR), Serbia (SRPS), Taiwan (ITRI), Ukraine (TR), USA (FM), Belarus (TR)

Ship approval

GL, RS

E3

# Plug and Socket Devices SolConeX 16 A Series 8570



## Technical Data

### Electrical data

#### Version

Rated operational voltage  
Main contacts  
Auxiliary contacts  
Rated operational current  
Main contacts  
Auxiliary contacts  
Switching capacity

#### Socket 8570/11, Plug 8570/12

max. 690 V AC / max. 110 V DC  
max. 500 V AC / max. 110 V DC  
16 A  
max. 6 A  
Main contacts:  
AC-3: 690 V, 16 A  
4 kW 220 V / 230 V / 240 V  
7.5 kW 380 V / 400 V / 415 V / 500 V  
11 kW 600 V / 690 V  
DC-1: 110 V, 16 A  
Auxiliary contacts:  
AC-15: 500 V, max. 1250 VA  
AC-15: 230 V, max. 1380 VA  
AC-12: 500 V, max. 3000 VA  
DC-13: 110 V, 110 W  
max. 16 A gG  
max. 4 pole switch  
2 optional auxiliary contacts (ON - delayed, OFF - advanced)

### Ambient conditions

#### Version

Ambient temperature

#### Socket 8570/11, Plug 8570/12

see explosion protection data -50 C° on request (internal lubrication using silicone grease)

### Mechanical data

#### Version

Degree of protection  
Enclosure material  
Switching handle

#### Socket 8570/11

IP66 acc. to IEC/EN 60529  
Polyamide, glass fibre reinforced, fire and saltwater resistant  
can be locked in 0 and I positions

#### Version

Degree of protection

#### Plug 8570/12

IP66 acc. to IEC/EN 60529

### Mounting / Installation

#### Version

Connection terminal

#### Socket 8570/11

2 x 1.5 ... 6 mm<sup>2</sup> solid  
2 x 1.5 ... 4 mm<sup>2</sup> finely-stranded

Cable entries

Cable gland

1 x M25 x 1.5  
(positioning on the top or at the side, according to the order)

Stopping plug

1 x M25 x 1.5

#### Version

Terminals


#### Plug 8570/12

Cable entries

1 x 1.5 ... 4 mm<sup>2</sup> finely stranded  
8 ... 20 mm cable diameter

### Arrangement of Earth Contact Sockets

Example:  
Clock hour position,  
Front view of socket



02395E00

Example:  
Clock hour  
position



230 V = 6 h

09195E00

Marking of connections  
Front view of socket



2 P + PE

09195E00



3 P + PE

06556E00



3 P + N + PE

06555E00

# Plug and Socket Devices SolConeX 16 A Series 8570




## Accessories and Spare Parts

Designation	Figure	Description	Art. no.	Weight kg
Auxiliary contact (retrofitable)		1 NO	<b>150682</b>	0.125
		1 NC	<b>150680</b>	0.125
		1 NO, gold contact	<b>150686</b>	0.125
		1 NC, gold contact	<b>150684</b>	0.125
Protective cap		for plug 16 A            3 pole not for extra-low voltage version	<b>150496</b>	0.043
		for plug 16 A            4 pole	<b>150510</b>	0.049
		for plug 16 A            5 pole	<b>150520</b>	0.056

E3

## Dimensional Drawings (All Dimensions in mm) - Subject to Alterations

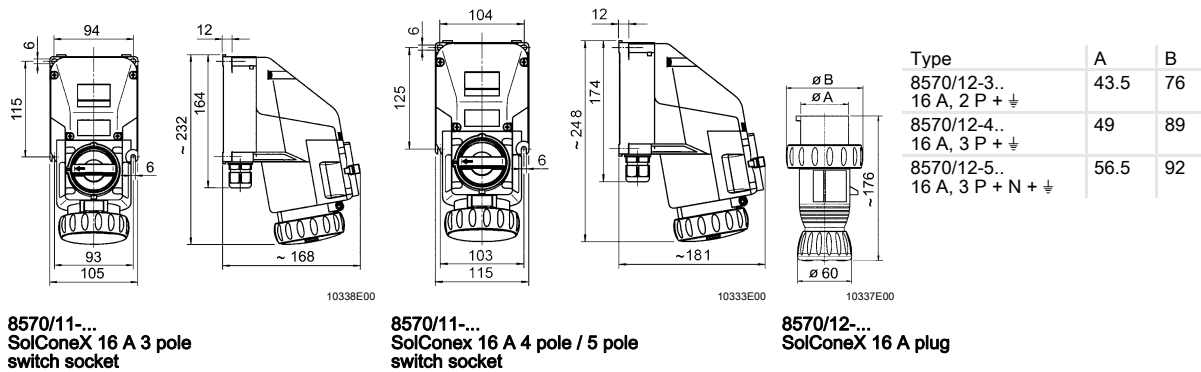

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice.  
The illustrations cannot be considered binding.