

**SolConeX compact flange socket**  
 Series 8572/15



- > Rotary switch mechanism
- > Integrated locking device
- > Zone 1 and 21
- > IP66
- > Wide ambient temperature range (-50 to +65 °C)
- > IEC/EN 60309-1/2 compatible
- > Full AC-3 switching capacity
- > kleine Einbaumaße

E3

www.stahl.de



18667E00

The SolConeX series of plug and socket devices is continuously being further developed according to the latest standards. Furthermore, our customers' requirements for their applications have been integrated into our innovative SolConeX Compact series.

Due to its extremely small dimensions, this series enables direct installation / mounting in machines and systems.

Direct insertion and locking by way of an integrated rotary switch ensures high connection reliability and reliable voltage disconnection with full AC-3 switching capability.

The high IP66 degree of protection ensures safe use and 100% functional safety in every application position.

The sealed plug pins reliably prevent the ingress of dirt or water into the connection chamber even when the plug is not plugged in.

The high quality plastics and sealing materials enable use even in extreme offshore, onshore, maritime, or pharmaceutical applications, in the demanding, freezing conditions of the Arctic Ocean or under direct sunlight in the desert.

	ATEX / IECEx					
Zone	0	1	2	20	21	22
For use in		x	x		x	x







**WebCode 8572C**

# SolConeX compact flange socket

## Series 8572/15



Selection Table

Version	No. of poles	Voltage [V]	Colour code	Frequency Hz	h	Order number	Art. no.	Weight kg
SolConeX flange socket  18663E00	 16992E00 2 P + $\perp$	>50	green	> 300-500	02	<b>8572/15-302</b>	<b>241405</b>	0.380
		50 ... 110	light grey	DC	03	<b>8572/15-303</b>	<b>241404</b>	0.380
		200 ... 250	blue	50 and 60	06	<b>8572/15-306</b>	<b>241401</b>	0.380
	 16992E00 1 P + N + $\perp$	According to isolating transformer	blue	50 and 60	12	<b>8572/15-312</b>	<b>241406</b>	0.380
		100 ... 130	yellow	50 and 60	04	<b>8572/15-304</b>	<b>241403</b>	0.380
		277	light grey	60	05	<b>8572/15-305</b>	<b>241402</b>	0.380
SolConeX plug  10329E00	 09195E00 1 P + N + $\perp$	277	light grey	60	05	<b>8570/12-305</b>	<b>257779</b>	0.400
		100 ... 130	yellow	50 and 60	04	<b>8570/12-304</b>	<b>257778</b>	0.400
	 09195E00 2 P + $\perp$	According to isolating transformer	blue	50 and 60	12	<b>8570/12-312</b>	<b>257781</b>	0.400
		200 ... 250	blue	50 and 60	06	<b>8570/12-306</b>	<b>257780</b>	0.400
		50 ... 110	light grey	DC	03	<b>8570/12-303</b>	<b>257777</b>	0.400
		>50	green	>300-500 <sup>*)</sup>	02	<b>8570/12-302</b>	<b>257776</b>	0.400

### Explosion Protection

Design	SolConeX 16 A flange socket	SolConeX plug
<b>Global (IECEx)</b>		
Gas and dust	IECEx PTB 16.0028U Ex db eb IIC Gb Ex tb IIIC Db	IECEx PTB 05.0023 Ex db eb IIC T6 Gb Ex tb IIIC T80 °C Db
<b>Europe (ATEX)</b>		
Gas and dust	PTB 16 ATEX 1016 U ⊕ II 2 G Ex db eb IIC Gb ⊕ II 2 D Ex tb IIIC Db	PTB 03 ATEX 1227 ⊕ II 2 G Ex db eb IIC T6 Gb ⊕ II 2 D Ex tb IIIC T80 °C Db
<b>Certifications and certificates</b>		
Certificates	IECEx, ATEX	IECEx, ATEX

### Technical Data

<b>Electrical data</b>	
Rated operational voltage	max. 277 V AC / 110 V DC
Frequency	0 to 60 Hz (for frequencies > 100 Hz, reduction to 12 A required)
Voltage tolerance	-10 ... +6 %
Utilization category	AC-3: 277 V / 16 A DC-1: 110 V / 16 A DC-13: 50 V / 16 A
Rated operational power	4 kW      220 V / 230 V / 240 V
Rated insulation voltage	550 V
Back-up fuse	

# SolConeX compact flange socket

## Series 8572/15




### Technical Data

without thermal protection	16 A gG		
with thermal protection	35 A gG		
Ambient conditions			
Ambient temperature	-50 to +65 °C -40 to +65 °C, optional (silicone-free)		
	Temperature class	Current	Ambient temperature
	T6	16 A [2.5 mm <sup>2</sup> ]	Ta = 45 °C
		12 A [2.5 mm <sup>2</sup> ]	Ta = 55 °C
		10 A [2.5 mm <sup>2</sup> ]	Ta = 65 °C
Mechanical data			
Number of poles	2 P + $\frac{1}{2}$ / 1 P + N + $\frac{1}{2}$		
Enclosure material	Polyamide, glass fibre reinforced		
Degree of protection	IP66 acc. to IEC/EN 60529		
Connection type	Screw terminals		
Connection cross-section	Solid	1 x 0.75 mm <sup>2</sup> to 2 x 4 mm <sup>2</sup>	
	Finely stranded	1 x 0.75 mm <sup>2</sup> to 2 x 4 mm <sup>2</sup>	
	Finely stranded with core end sleeve	1 x 0.75 mm <sup>2</sup> to 2 x 4 mm <sup>2</sup>	
Weight	0.310 kg		
Service life	> 5,000 switching cycles (electrical and mechanical) acc. to IEC/EN 60309-1		
Tightening torque	Terminals: 1.2 Nm		
Cable entries			
Plug cable diameter	8 ... 18 mm		
	Ring 1 + 2 + 3 + 4	8 ... 11 mm	
	Ring 2 + 3 + 4	11 ... 15 mm	
	Ring 3 + 4	15 ... 18 mm	

E3

### Arrangement of Earth Contact Sockets

Example:  
Clock hour position,  
Front view of socket



18442E00

Example:  
Clock hour position



18609E00

230 V = 6 h

Marking of connections  
Front view of socket



18609E00

2 P +  $\frac{1}{2}$



18443E00



1 P + N +  $\frac{1}{2}$

# SolConeX compact flange socket


## Series 8572/15



### Accessories and Spare Parts

Designation	Figure	Description	Art. no.	Weight
Protective cap	 05365E00	for plug 3 pole	150496	kg 0.043
Dust cover	 18324E00	Retrofittable dust protection for 3-pole sockets.	257438	

### Dimensional drawings (all dimensions in mm [inches]) – Subject to modifications

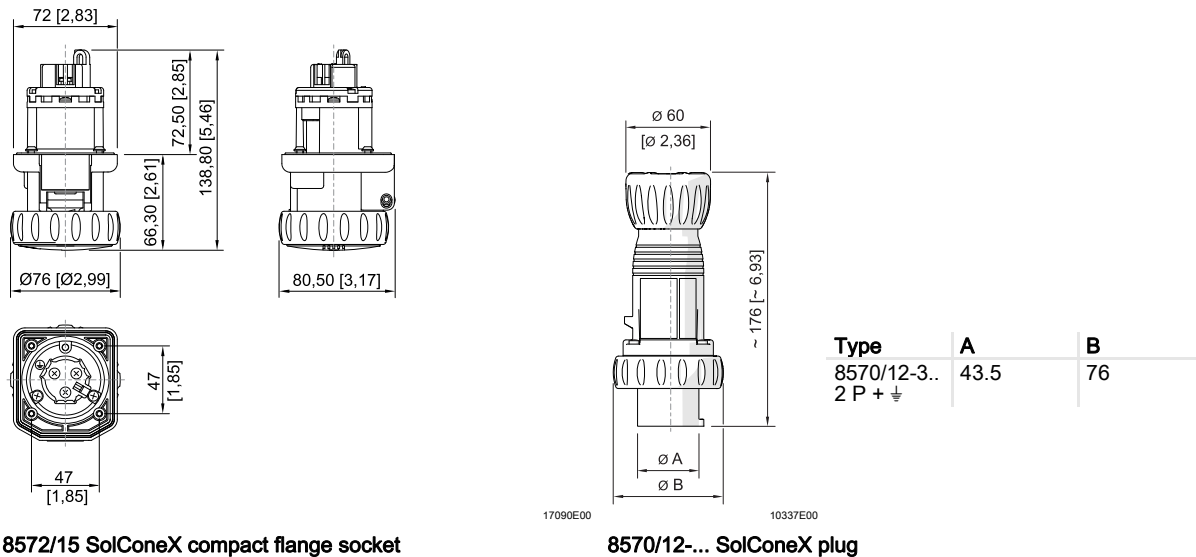

8572/15 SolConeX compact flange socket

8570/12-... SolConeX plug

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.