



## SE 564 Memosens ORP Sensor

Heavy duty ORP sensor providing high reliability and precision

Heavy duty ORP sensor designed for highly contaminated media with pressure fluctuations. The state-of-the-art polymer electrolyte of the reference system provides good long-term stability.

The 2-hole junction prevents blocking also in waste water containing solid impurities.

### Applications

Industrial applications, dyes, precipitation reactions, polluted media


### Facts and Features

- perfect galvanic isolation thanks to Memosens technology
- no influence of humidity in the connector
- digital data transfer
- integrated sensor diagnostics
- polymer electrolyte
- integrated temperature detector
- 2-hole junction - no blocking
- for industrial sewages
- suitable for solvent-containing processes

### Specifications

ORP:	-1500 mV ... +1500 mV
Temperature:	0 ... 130 °C
Pressure, relative:	0 ... 10 bar
Temperature detector:	NTC 30 kΩ
Material of measuring electrode:	platinum
Reference system:	Ag/AgCl, polymer electrolyte
Junction:	hole (2 x)
Length:	120 mm / 225 mm
Process adaptation:	PG 13.5
Sensor connector:	Memosens
ATEX marking:	II 1 G Ex ia IIC T3 / T4 / T6 Ga

### Dimension Drawing

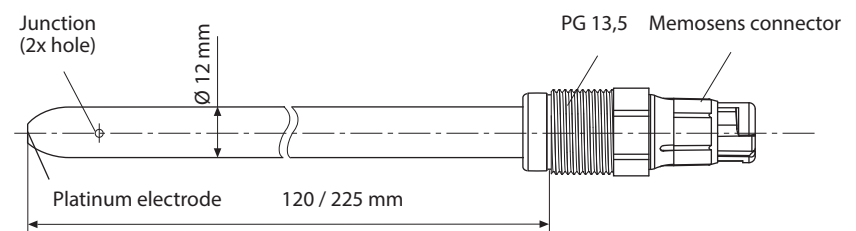

# SE 564 Memosens ORP Sensor

## Product Range

### Product Range

SE 564 Memosens ORP sensor

### Length

120 mm  
225 mm

### Order No.

SE 564X/1-NMSN  
SE 564X/2-NMSN

### Cable

Memosens cable

### Length

3 m  
5 m  
10 m  
20 m<sup>\*)</sup>

### Order No.

CA/MS-003NAA  
CA/MS-005NAA  
CA/MS-010NAA  
CA/MS-020NAA

Memosens cable, Ex



3 m  
5 m  
10 m  
20 m<sup>\*)</sup>

CA/MS-003XAA  
CA/MS-005XAA  
CA/MS-010XAA  
CA/MS-020XAA

### Buffer Solutions

Redox buffer solution (220 mV, pH 7)

250 ml

### Order No.

ZU 0317

<sup>\*)</sup> Greater lengths on request